

## ISEN200: 200Wp

## Features



- Excellent Power Output with +ve Tolerance.
- 10 Year Limited Product Warranty
- 25 Year Linear Power Guarantee
- Generate Power even at Low Light
- High Performance Modules with 15.20% efficiency.
- PID Resistance


- ARC, Ultra-clear toughened and textured glass
- Multi layer tedlar® and Fast Cure EVA
- Reinforced anodized aluminium frame
- Pre-drilled frame for easy mounting
- IP-65 & IP-67 rated Junction Box
- Solar MC4 compatible connector

## Applications

- On-grid systems
- BIPV
- Solar farms
- Standalone (off-grid) systems

## Constructional Characteristics

- Frame
- Glass
- EVA
- Cells
- Back sheet





## Certifications

- IEC 61215 & 61730
- IEC 61701 (Salt Mist Test)
- IEC 62804 (PID)
- NABL-MNRE (UL) Certified
- ISO 9001-2015; ISO 14001-2015

Specifications	ISEN200
Cell	Multicrystalline Solar Cell
<b>Electrical Characteristics</b>	
Open Circuit Voltage (Voc)	29.64 V
Optimum Operating Voltage (Vmp)	24.14 V
Short Circuit Current (Isc)	8.74 A
Optimum operating Current (Imp)	8.31 A
Power at STC (Pmax)	200 W
Module Efficiency (η)%	15.20%
Module Fill Factor (FF)%	77.40%
Operating Conditions	- 40 C to + 85 C at 85% RH
Temperature Co-efficient for Voc/ C (β)	-0.34%
Temperature Co-efficient for Isc/ C (α)	0.05%
Temperature Co-efficient for power/ C (γ)	-0.40%
NOCT	45°C ± 2°C
<b>Mechanical Characteristics</b>	
Weight	14.2 Kg
Module Dimension (A) x (B) x (C)	1336 x 986 x 35 mm
Mounting Hole (Oblong) (I x J)	7 x 12 mm
Mounting Hole CTC distance - vertical (H)	668 mm
Mounting Hole distance from corner (E)	334 mm
Mounting Hole CTC distance - horizontal (F)	949 mm

## Frame Design

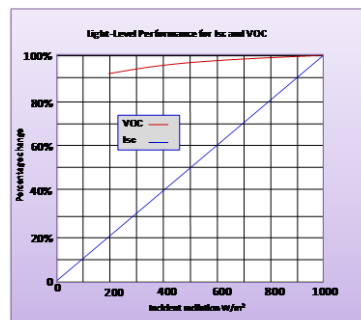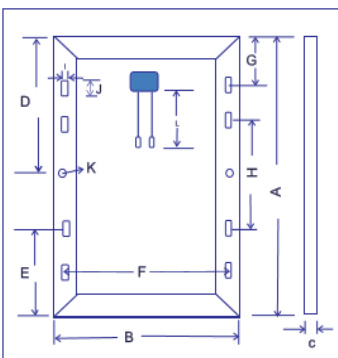

## Linear Power Guarantee on En-Icon PV modules

